


HP LaserJet 3390/3392 All-in-One Service Manual

For the complete PDF manual
please visit www.LaserPros.com.

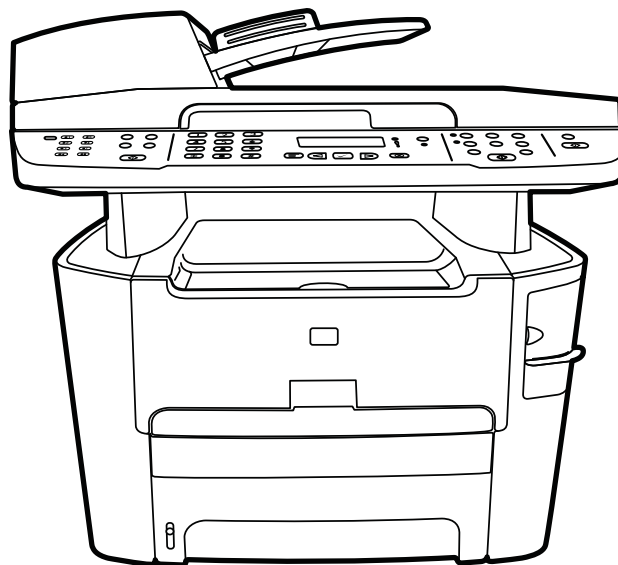

HP LaserJet 3390/3392 All-in-One

Service Manual



Copyright information

© 2005 Copyright Hewlett-Packard Development Company, L.P.

Reproduction, adaptation, or translation without prior written permission is prohibited, except as allowed under the copyright laws.

The information contained herein is subject to change without notice.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Part number Q6500-90901

Edition 2, 10/2005

Safety information

WARNING!

Potential Shock Hazard

Always follow basic safety precautions when using the all-in-one to reduce risk of injury from fire or electric shock.

Read and understand all instructions in the user guide.

Observe all warnings and instructions marked on the all-in-one.

Use only a grounded electrical outlet when connecting the all-in-one to a power source. If you do not know whether the outlet is grounded, check with a qualified electrician.

Do not touch the contacts on the end of any of the sockets on the all-in-one. Replace damaged cords immediately.

Unplug the all-in-one from wall outlets before cleaning.

Do not install or use the all-in-one near water or when you are wet.

Install the product securely on a stable surface.

Install the all-in-one in a protected location where no one can step on or trip over the power cord and where the power cord will not be damaged.

If the all-in-one does not operate normally, see the online user guide.

Refer all servicing questions to qualified personnel.

Information regarding FCC Class B, Parts 15 and 68 requirements can be found in the user guide.

Trademark credits

Microsoft® and Windows® are U.S. registered trademarks of Microsoft Corporation.

Linux is a U.S. registered trademark of Linus Torvalds.

UNIX® is a registered trademark of The Open Group.

PostScript® is a trademark of Adobe Systems Incorporated.

Energy Star® and the Energy Star logo® are U.S. registered marks of the United States Environmental Protection Agency.



FCC Regulations

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy. If this equipment is not installed and used in accordance with the instructions, it may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase separation between equipment and receiver.

Connect equipment to an outlet on a circuit different from that to which the receiver is located.

Consult your dealer or an experienced radio/TV technician.

Any changes or modifications to the printer that are not expressly approved by HP could void the user's authority to operate this equipment.

Use of a shielded interface cable is required to comply with the Class B limits of Part 15 of FCC rules.

This equipment complies with FCC rules, Parts 15 and 68. On the back of this equipment is a label that contains, among other information, the FCC registration number and ringer equivalence number (REN) for this equipment. If requested, this information must be provided to the telephone company. The REN is used to determine the quantity of devices which may be connected to the telephone line. Excessive RENs on the telephone line may result in the devices not ringing in response to an incoming call. In most, but not all, areas, the sum of the RENs should not exceed five (5.0). To be certain of the number of devices that may be connected to the line, as determined by the total RENs, contact the telephone company to determine the maximum REN for the calling area.

This equipment uses the following USOC jacks: RJ11C.

An FCC-compliant telephone cord and modular plug is provided with this equipment.

This equipment is designed to be connected to the telephone network or premises wiring using a compatible modular jack which is Part 68 compliant. This equipment cannot be used on telephone company-provided coin service. Connection to Party Line Service is subject to state tariffs. If this equipment causes harm to the telephone network, the telephone company will notify you in advance that temporary discontinuance of service may be required. If advance notice is not practical, the telephone company will notify the customer as soon as possible. Also, you will be advised of your right to file a complaint with the FCC if you believe it is necessary. The telephone company may make changes in its facilities, equipment, operations, or procedures that could affect the operation of the equipment. If this happens, the telephone company will provide advance notice in order for you to make the necessary modifications in order to maintain uninterrupted service. If trouble is experienced with this equipment, please see the numbers in the front of this manual for repair and (or) warranty information. If the trouble is causing harm to the telephone network, the telephone company may request you remove the equipment from the network until the problem is resolved. The following repairs can be done by the customer: Replace any original equipment that came with the device. This includes the print cartridge, the supports for trays and bins, the power cord, and the telephone cord. It is recommended that the customer install an ac surge arrestor in the ac outlet to which this device is connected. This is to avoid damage to the equipment caused by local lightning strikes and other electrical surges.

See the electronic user guide for more regulatory information.

Table of contents

1 Product information

Quick access to all-in-one information	2
All-in-one configurations	3
All-in-one features	5
Product walkaround	7
HP LaserJet 3390/3392 all-in-one	7
Interface ports	9
Control panel	9
Model and serial numbers	10
Software description	11
Supported drivers	11
Additional drivers	11
Software installation	12
Typical installation	12
Minimum installation	12
Software for Windows	13
Software components for Windows	13
HP ToolboxFX	13
Embedded Web server (EWS)	13
Software for Macintosh	14
HP Director	14
Macintosh Configure Device (Mac OS X V10.3 and Mac OS X V10.4)	14
PDEs (Mac OS X V10.3 and Mac OS X V10.4)	15
Uninstalling software	16
Windows	16
Macintosh	16
Media specifications	17
Supported media weights and sizes	17
Media to avoid	18
Media that can damage the all-in-one	19

2 Installation

Operating environment	22
Minimum system requirements	23
Unpacking	24
Installing input devices	25
ADF input tray	25
250-sheet input tray (tray 3)	26
Installing the control-panel faceplate	27

Loading media	28
Loading documents to fax, copy, or scan	28
Loading the single-sheet priority input slot (tray 1)	30
Loading tray 2 or optional tray 3	30
Installing accessories	32
Removing and replacing a DIMM	32

3 Maintenance

Managing supplies	36
Life expectancies of supplies and the all-in-one	36
Ordering supplies	36
Storing print cartridges	37
Replacing and recycling supplies	37
Replacing the print cartridge	39
Replacing the staple cassette	42
Replacing the tray 2 pickup roller	44
Replacing the tray 2 and optional tray 3 separation pad	49
HP policy on non-HP supplies	52
Resetting the all-in-one for non-HP supplies	52
HP fraud hotline	52
Cleaning the all-in-one	53
To clean the exterior	53
Cleaning the flatbed scanner glass	53
Cleaning the scanner-cover backing	55
Cleaning the tray 2 pickup roller	56
Cleaning the ADF pickup-roller assembly	60
Cleaning the print path	63
Managing the all-in-one	65
Information pages	65
Using the HP ToolboxFX	68
To view the HP ToolboxFX	68
Status	68
Event log	69
Alerts	69
Set up status alerts	69
Set up e-mail alerts	69
Fax	70
Fax tasks	70
Fax phone book	70
Fax send log	73
Fax receive log	73
Help (Documentation)	73
System settings	74
Device information	74
Paper handling	75
Print quality	75
Paper types	75
System setup	76
Service	76
Device Polling	76

Print settings	76
Printing	76
PCL 5e	77
PostScript	77
Network settings	77
Using Macintosh Configure Device (Mac OS X V10.3 and Mac OS X V10.4)	78
Understanding the Embedded Web server	79
Features	79

4 Theory of operation

Basic operation	82
Sequence of operation for the base unit	82
Scanner and ADF functions and operation	84
Scanner functions	84
Scanner operation	85
ADF operation	85
ADF paper path and ADF sensors	86
ADF jam detection	87
Internal components (base unit)	88
Engine control system	90
Laser/scanner system	92
Pickup/feed/delivery system	93
Image-formation system	95
Fax functions and operation	99
Computer and network security features	99
PSTN operation	99
To receive faxes when you hear fax tones	100
Distinctive ring function	100
Faxing with Voice over IP services	101
The fax subsystem	101
Formatter in the fax subsystem	101
LIU in the fax subsystem	102
Safety isolation	102
Safety-protection circuitry	102
Data path	103
Hook state	103
Downstream current detection	103
Hook switch control	104
Ring detect	104
Line current control	104
Billing- (metering-) tone filters	104
Fax page storage in flash memory	105
Stored fax pages	105
Advantages of flash memory storage	105

5 Removal and replacement

Introduction	108
Removal and replacement strategy	108
Electrostatic discharge	108
User-replaceable parts	109

Required tools	109
Before performing service	109
After performing service	110
Post-service tests	110
Test 1 (print-quality test)	110
Test 2 (copy-quality test)	110
Test 3 (fax-quality test)	111
Parts removal order	112
Remove the print cartridge	113
External panels, covers, and doors	114
Right cover	114
Left cover	116
Print-cartridge door	118
Rear cover	120
Top cover	122
Replacing the ADF pickup-roller assembly	124
ADF assembly	127
Scanner/ADF assembly	129
Bezel and control panel	131
Internal assemblies	134
Convenience-stapler assembly (HP LaserJet 3392 only)	134
Convenience-stapler power supply (HP LaserJet 3392 only)	136
Convenience-stapler ac inlet cable (HP LaserJet 3392 only)	138
Convenience-stapler power supply bracket and strap (HP LaserJet 3392 only)	139
Speaker	140
Power-switch PCA	142
Formatter	143
Duplex assembly	146
Laser/scanner	148
Memory-tag-reader assembly	150
Fuser	152
Fan	152
Duplex-drive gears	154
Duplex solenoid	155
Fuser	157
Interlock assembly	163
ECU	164
Main motor	169
Pickup-and-feed assemblies	171
Transfer roller	171
Registration-roller assembly	172
Main gear assembly and tray 2 pickup solenoid	173
6 Troubleshooting	
Troubleshooting process	178
Troubleshooting checklist	178
Jams	181
Causes of jams	181
Tips to avoid jams	182
Where to look for jams	182

Jams in the print-cartridge area	183
Jams in the trays	186
Jams in the output bin	191
Jams in the straight-through output path	192
Jams in the duplex path	194
Jams in the ADF	199
Jams in the convenience stapler (HP LaserJet 3392 only)	204
Control-panel messages	207
Alerts and warning messages	207
Critical-error message-tables	212
Print problems	215
Print-quality problems	215
Improving print quality	215
Understanding print-quality settings	215
To temporarily change print-quality settings	215
To change print-quality settings for all future jobs	216
Identifying and correcting print defects	217
Print-quality checklist	217
General print-quality issues	217
Media-handling problems	222
Print-media guidelines	222
Solving print-media problems	222
Performance problems	224
Scan problems	225
Solving scanned-image problems	225
Scan-quality problems	227
Preventing problems	227
Solving scan-quality problems	227
Copy problems	228
Preventing problems	228
Image problems	228
Media-handling problems	229
Performance problems	231
Fax troubleshooting	232
General fax troubleshooting	232
Problems receiving faxes	234
Problems sending faxes	236
Voice-call problems	238
Media-handling problems	238
Performance problems	239
Control-panel display problems	240
Convenience-stapler problems (HP LaserJet 3392 only)	240
DSL problems	241
PABX line problems	241
ADF problems	242
Functional checks	244
Drum rotation test	244
Engine test	245
Half self-test functional check	246
To perform a half self-test check	246

To perform other checks	246
Heating element check	247
High-voltage contacts check	247
To check the print-cartridge contacts	247
To check the high-voltage connector assembly	248
Service-mode functions	249
NVRAM initialization	249
Secondary service menu	249
Troubleshooting tools	251
All-in-one pages and reports	251
Demo page	251
Configuration page	251
Supplies Status page	251
Fax reports	252
Fax activity log	252
Fax call report	252
Phone book report	252
Billing-code report	253
HP ToolboxFX	253
To view HP ToolboxFX	253
Troubleshooting tab	253
Service menu	254
Restoring the factory-set defaults	254
Cleaning the paper path	254
T.30 protocol trace	255
Archive print	255
Firmware updates and recovery	256
Firmware update by using a flash executable file	256
Firmware-recovery DIMM	256

7 Parts

Accessories and ordering information	259
Supplies	260
Memory	260
Cable and interface accessories	260
Paper-handling accessories	261
Scanner/ADF replacement parts	261
Control-panel bezels	262
Supplementary documentation and support	263
Troubleshooting diagrams	266
Repetitive image defects	266
Interface connectors	267
Formatter connectors	268
Line interface unit (LIU)	269
Solenoids	270
Switches and sensors	271
Rollers and pads	272
PCAs (base unit)	273
Major components (base unit)	274
Scanner and ADF	275

Circuit diagram	276
How to use the parts lists and diagrams	278
Types of screws	278
Scanner and ADF assemblies	280
Scanner components	282
ADF components	284
Convenience stapler components (HP LJ 3392 only)	286
Formatter, LIU, HP jewel, and nameplate	288
External covers and panels	290
Internal components (1 of 4)	292
Internal components (2 of 4)	294
Internal components (3 of 4)	296
Internal components (4 of 4)	298
Engine-controller assembly	300
Main-drive assembly	302
Duplexing-drive assembly	304
Tray 2 cassette and tray 3 cassette/feeder	306
Duplexing assembly	308
Fuser assembly	310
Alphabetical parts list	312
Numerical parts list	317

Appendix A All-in-one specifications

Physical specifications	324
Supplies specifications	324
Performance	325
Electrical specifications	327
Power consumption	327
Environmental specifications	328
Acoustic emissions	328

Appendix B Warranty information

Hewlett-Packard limited warranty statement	330
Print Cartridge Limited Warranty Statement	331
Extended warranty	332

Appendix C Regulatory statements

Declaration of conformity (HP LaserJet 3390, 3392, 3055, and 3050)	334
Country/region-specific safety statements	335
Laser safety statement	335
Canadian DOC statement	335
Korean EMI statement	335
Finnish laser statement	336
Japan power cord statement	336

Index	337
-------------	-----

For the complete PDF manual
please visit www.LaserPros.com.